

RAM-TF002 Tuned Frequency Microwave Absorber Material**Product overview**

Shielding Solutions Tuned Frequency Absorbers are a thin magnetically loaded sheet stock. Tuned Frequency Absorbers, also known as resonant frequency absorbers, provide great reflection loss at a discrete frequency, typically offering 20dB of attenuation. Tuned Frequency Absorbers offer a narrowband of absorption, typically +/- 10% of the resonant frequency, so are best used when a single discrete frequency is trying to be absorbed.

Properties


Hardness - Shore A	60 - 80
Flammability Rating (Halogen Free)	None
Elastomer	Nitrile
Operating Temperature (°C)	-50 to 150
Colour	Dark Grey

Availability

- Standard sheets are 305 x 305mm (12"x12") with or without PSA
- 610 x 610mm Sheets available
- Thickness varies depending on frequency desired.
- Other base materials available (i.e. Nitrile).
- The material can also be supplied in customized shapes.

RAM-TF002 Tuned Frequency Microwave Absorber Material

Shielding Effectiveness

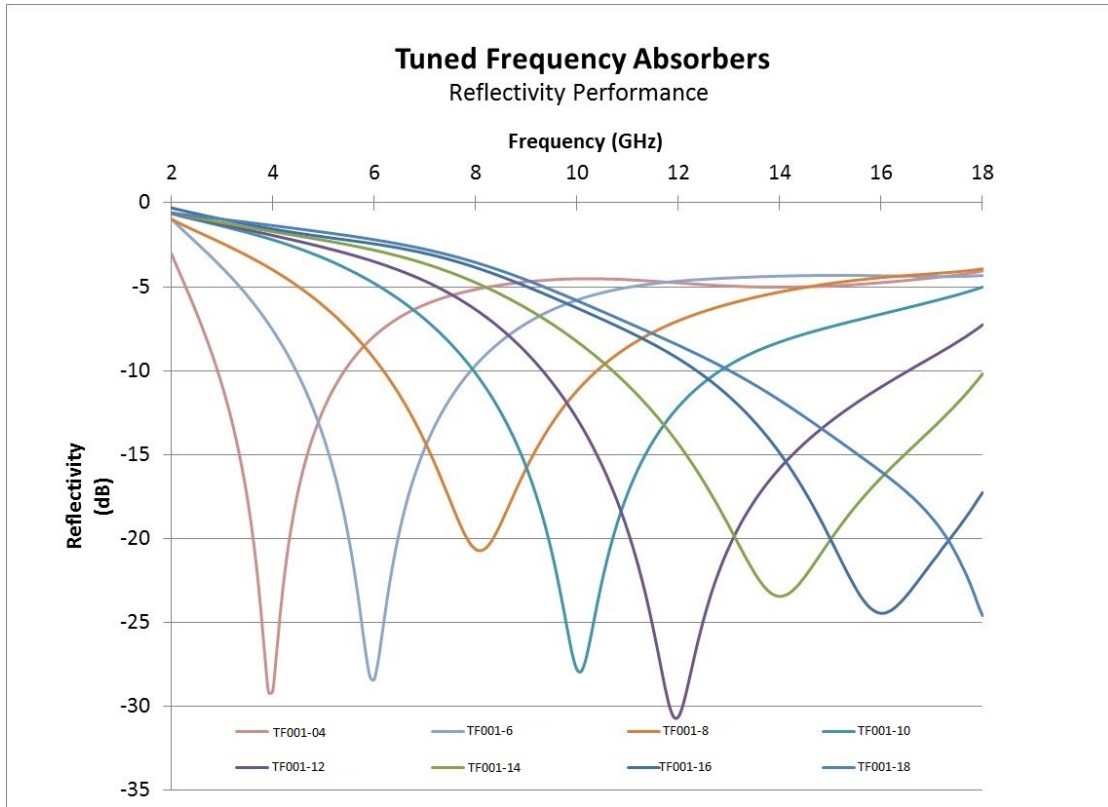

RAM-TF002 Tuned Frequency Microwave Absorber Material

Application

- Ship masts
- Specular return (RCS)
- Discrete frequency absorption
- Antenna isolation and patterning
- Aircraft ducts and seals
- Instrument housings

Shielding Solutions Ltd
410 Avenue West
Skyline 120
Great Notley
Essex
CM77 7AA

Tel: 01376 330033

Fax:01376 339163

Web: www.shielding-solutions.com